

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 091 516 A1**

(12) **EUROPEAN PATENT APPLICATION**  
published in accordance with Art. 158(3) EPC

(43) Date of publication:  
11.04.2001 Bulletin 2001/15

(51) Int. Cl.<sup>7</sup>: **H04J 13/04**, H04B 7/26,  
H04B 1/40, H03G 3/20

(21) Application number: 00915562.3

(86) International application number:  
**PCT/JP00/02498**

(22) Date of filing: 18.04.2000

(87) International publication number:  
**WO 00/65758 (02.11.2000 Gazette 2000/44)**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **HIRAMATSU, Katsuhiko**  
Yokosuka-shi, Kanagawa 238-0031 (JP)

(30) Priority: 23.04.1999 JP 11605499

(74) Representative:  
**Grünecker, Kinkeldey,  
Stockmair & Schwanhäusser  
Anwaltssozietät  
Maximilianstrasse 58  
80538 München (DE)**

(71) Applicant:  
**MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.**  
Kadoma-shi, Osaka 571-8501 (JP)

(54) **BASE STATION DEVICE AND METHOD OF SUPPRESSING PEAK CURRENT**

(57) An envelope calculation section (113) calculates the amplitude of a transmission signal after the multiplexing thereof. When the calculated amplitude is beyond a permissible amplitude value, a correction coefficient calculation section (114) calculates a correction coefficient that is the difference between amplitude values before and after a correction. Multiplication sections (115) and (116) calculate a correction value by

multiplying a filter coefficient by a correction coefficient. Subtraction sections (119) and (120) subtract the correction value from the transmission signal after a filtering operation. Thereby, the transmission amplitude at the time of a peak can be suppressed without increasing the number of filter operation circuits.

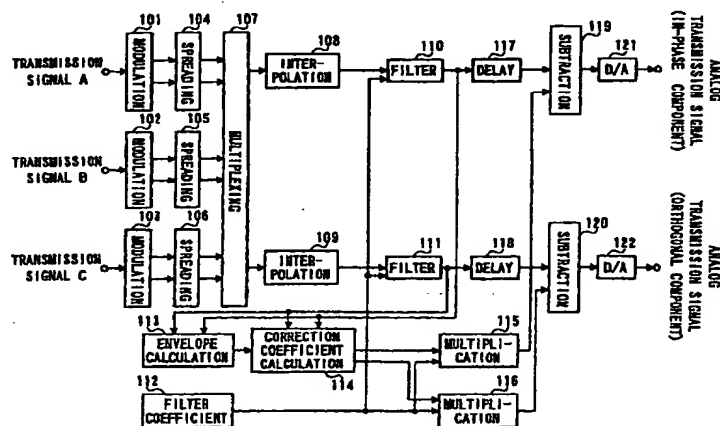


FIG. 2

EP 1 091 516 A1

## Description

### Technical Field

[0001] The present invention relates to a base station apparatus and a method for suppressing a peak power for a cellular system of an automobile telephone, a portable telephone and the like.

### Background Art

[0002] A cellular system for an automobile telephone, a portable telephone and the like, the demand of which is rapidly increasing in recent years, is a system where a base station is located at the center of each cell and the base station and one or more communication terminals in the cell simultaneously perform radio communication in multiple access.

[0003] A code division multiple access (CDMA) system, one of the multiple access systems, is a system where a signal spread in a wide band that is obtained by multiplying modulated information data by a spreading code is transmitted from the transmission side and the information data is demodulated on the reception side by performing the despreading of a received signal by multiplying it by the same spreading code as that on the transmission side at the same timing as that on the transmission side. Because each user can utilize the same frequency band in the CDMA system, the increase of channel capacity can be schemed. Consequently, the CDMA system is widely noticed for a cellular system.

[0004] However, each user utilizes the same frequency band at the same time in the CDMA system, a base station should transmit a plurality of signals by multiplexing them. Consequently, the CDMA system has a problem that a transmission amplitude at a peak time becomes very high in comparison with an average amplitude. For preventing the distortion of a transmission signal even at the time of a peak, an amplifier having a large linear operating range should be used. Then, a high voltage power source is needed, which makes the apparatus larger.

[0005] Accordingly, for overcoming the problem, methods for suppressing the transmission amplitude at a peak time have conventionally been examined. There is a conventional base station disclosed in Japanese laid-open patent publication Hei 10-126309 as a base station that can suppress the transmission amplitude at a peak time.

[0006] Fig. 1 is a block diagram showing the structure of a conventional base station. Incidentally, in the following description, a case where QPSK modulation is used in primary modulation will be described as an example. Furthermore, it is supposed that a base station is performing radio communication with three users A-C.

[0007] In Fig. 1, a modulation section 1 performs

the QPSK modulation of a transmission signal A to be transmitted to a user A, and outputs an in-phase component and an orthogonal component of the signal after the modulation to a spreading section 4. Similarly, a modulation section 2 performs the QPSK modulation of a transmission signal B to be transmitted to a user B, and outputs an in-phase component and an orthogonal component of the signal after the modulation to a spreading section 5. A modulation section 3 performs the QPSK modulation of a transmission signal C to be transmitted to a user C, and outputs an in-phase component and an orthogonal component of the signal after the modulation to a spreading section 6.

[0008] The spreading section 4 performs spread processing in which a peculiar spreading code is multiplied to the transmission signal A modulated in the QPSK modulation, and outputs the spread signal to a multiplexing section 7. Similarly, the spreading section 5 performs spread processing in which a peculiar spreading code is multiplied to the transmission signal B modulated in the QPSK modulation, and outputs the spread signal to the multiplexing section 7. The spreading section 6 performs spread processing in which a peculiar spreading code is multiplied to the transmission signal C modulated in the QPSK modulation, and outputs the spread signal to the multiplexing section 7.

[0009] The multiplexing section 7 divides spread signals outputted from the spreading sections 4-6 into in-phase components and orthogonal components to add them respectively. The multiplexing section 7 then outputs an in-phase component signal to an interpolation section 8 and a delay section 15, and outputs an orthogonal component signal to an interpolation section 9 and a delay section 14.

[0010] The interpolation sections 8 and 9 increase their sampling rates by M (M is a natural number) times, and perform zero-insertion interpolation where zero is inserted at a sampling point where no signal exists, respectively.

[0011] A filter 10 performs the band restriction of an interpolated signal outputted from the interpolation section 8 by means of a filter coefficient set in a filter coefficient memory 12 previously, and outputs the signal after the band restriction to an amplitude controlling section 13. Similarly, a filter 11 performs the band restriction of an interpolated signal outputted from the interpolation section 9 by means of a filter coefficient set in the filter coefficient memory 12 previously, and outputs the signal after the band restriction to an amplitude controlling section 14.

[0012] The amplitude controlling section 13 measures the amplitude value of a signal, the band restriction of which has been performed by the filter 10, and when the measured value is larger than a previously set permissible amplitude value, the amplitude controlling section 13 controls the attenuation amount of the in-phase component of a transmission signal at an attenuation section 17. Similarly, the amplitude controlling section

14 measures the amplitude value of a signal, the band restriction of which has been performed by the filter 11, and when the measured value is larger than a previously set permissible amplitude value, the amplitude controlling section 14 controls the attenuation amount of the orthogonal component of a transmission signal at an attenuation section 18.

[0013] A delay section 15 delays a signal of an in-phase component outputted from the multiplexing section 7 for a time equal to a necessary time for a series of attenuation amount operating processing performed in the interpolation section 8, the filter 10 and the amplitude controlling section 13, and the delay section 15 outputs the delayed signal to the attenuation section 17. Similarly, a delay section 16 delays a signal of an orthogonal component outputted from the multiplexing section 7 for a time equal to a necessary time for a series of attenuation amount operating processing performed in the interpolation section 9, the filter 11 and the amplitude controlling section 14, and the delay section 16 outputs the delayed signal to the attenuation section 18.

[0014] The attenuation section 17 attenuates the amplitude of the in-phase component of a transmission signal under the control of the amplitude controlling section 13. Similarly, the attenuation section 18 attenuates the amplitude of the orthogonal component of a transmission signal under the control of the amplitude controlling section 14.

[0015] Interpolation sections 19 and 20 increase their sampling rates by M (M is a natural number) times, and perform zero-insertion interpolation where zero is inserted at a sampling point where no signal exists, respectively.

[0016] A filter 21 performs the band restriction of an interpolated signal outputted from the interpolation section 19 by means of a filter coefficient set in the filter coefficient memory 12 previously, and outputs the signal after the band restriction to a D/A conversion section 23. Similarly, a filter 22 performs the band restriction of an interpolated signal outputted from the interpolation section 20 by means of a filter coefficient set in the filter coefficient memory 12 previously, and outputs the signal after the band restriction to a D/A conversion section 24.

[0017] The D/A conversion section 23 converts a transmission signal of a digital in-phase component outputted from the filter 21 to an analog signal. Similarly, the D/A conversion section 24 converts a transmission signal of a digital orthogonal component outputted from the filter 22 to an analog signal.

[0018] As described above, the conventional base station measures an amplitude value of a signal the band of which is restricted by means of filter operations, and when the measured value is larger than a permissible amplitude value set previously, the transmission amplitude at the time of a peak is suppressed by controlling the attenuation amount of a transmission signal.

[0019] However, the filter operation needs a long tap length for preventing deterioration in its pass band and for obtaining very large suppressing characteristics in its rejection band. The aforesaid base station needs two filter operation circuits per component. For example, in case of the QPSK modulation, four filter operation circuits are needed.

[0020] That is, the aforesaid conventional base station should increase its filter operation circuit for suppressing a transmission amplitude at the time of a peak. Consequently, the conventional base station has a problem that the scale of its circuit increases and its consumption electric power also increases.

#### Disclosure of Invention

[0021] The object of the present invention is to provide a base station apparatus capable of suppressing a transmission amplitude at the time of a peak without increasing the number of its filter operation circuits and a method for suppressing its peak power.

[0022] The object can be attained by calculating a correction coefficient when the amplitude of a transmission signal is beyond a permissible amplitude value, and by subtracting a correction value obtained by multiplying a correction coefficient by a filter coefficient from a transmission signal after filtering operation.

#### Brief Description of Drawings

##### [0023]

Fig. 1 is a block diagram showing the structure of a conventional base station;

Fig. 2 is a block diagram showing the structure of a base station according to a first embodiment of the present invention;

Fig. 3 is a signal point layout drawing for illustrating a correction coefficient calculation processing of the base station according to the first embodiment of the present invention; and

Fig. 4 is a block diagram showing the structure of a base station according to a second embodiment of the present invention.

#### Best Mode for Carrying Out the Invention

[0024] Hereafter, embodiments of the present invention will be described in detail with reference to the attached drawings. Incidentally, in the following description a case where QPSK modulation is used in primary modulation will be described as an example. Furthermore, it is supposed that a base station is performing radio communication with three users A-C.

##### (EMBODIMENT 1)

[0025] Fig. 2 is a block diagram showing the struc-

ture of a base station according to the embodiment 1 of the present invention.

[0026] In Fig. 2, a modulation section 101 performs the QPSK modulation of a transmission signal A to be transmitted to a user A, and outputs an in-phase component and an orthogonal component of the signal after the modulation to a spreading section 104. Similarly, a modulation section 102 performs the QPSK modulation of a transmission signal B to be transmitted to a user B, and outputs an in-phase component and an orthogonal component of the signal after the modulation to a spreading section 105. A modulation section 103 performs the QPSK modulation of a transmission signal C to be transmitted to a user C, and outputs an in-phase component and an orthogonal component of the signal after the modulation to a spreading section 106.

[0027] The spreading section 104 performs spread processing in which a peculiar spreading code is multiplied to the transmission signal A modulated in the QPSK modulation, and outputs the spread signal to a multiplexing section 107. Similarly, the spreading section 105 performs spread processing in which a peculiar spreading code is multiplied to the transmission signal B modulated in the QPSK modulation, and outputs the spread signal to a multiplexing section 107. The spreading section 106 performs spread processing in which a peculiar spreading code is multiplied to the transmission signal C modulated in the QPSK modulation, and outputs the spread signal to a multiplexing section 107.

[0028] The multiplexing section 107 divides spread signals outputted from the spreading sections 104-106 into in-phase components and orthogonal components to add them respectively. The multiplexing section 107 then outputs an in-phase component signal to an interpolation section 108, and outputs an orthogonal component signal to an interpolation section 109.

[0029] The interpolation sections 108 and 109 increase their sampling rates by M (M is a natural number) times, and perform zero-insertion interpolation where zero is inserted at a sampling point where no signal exists, respectively. For example, in case of increasing the sampling rates by four times, the interpolation sections 108 and 109 insert three zeros among original sampling points.

[0030] A filter 110 performs the band restriction of an interpolated signal outputted from the interpolation section 108 by means of a filter coefficient set in a filter coefficient memory 112 previously, and outputs the signal after the band restriction to an envelope calculation section 113, a correction coefficient calculation section 114 and a delay section 117. Similarly, a filter 111 performs the band restriction of an interpolated signal outputted from the interpolation section 109 by means of a filter coefficient set in the filter coefficient memory 112 previously, and outputs the signal after the band restriction to the envelope calculation section 113, the correction coefficient calculation section 114 and a delay section 118.

[0031] The envelope calculation section 113 calculates an amplitude of a transmission signal that is a square root of the sum of the square of an in-phase component outputted from the filter 110 and the square of an orthogonal component outputted from the filter 111, and outputs the calculated amplitude to the correction coefficient calculation section 114. Incidentally, the locus of the calculated amplitude of the transmission signal is the envelope.

[0032] The correction coefficient calculation section 114 performs the comparison of largeness between the amplitude of a transmission signal calculated by the envelope calculation section 113 and the permissible amplitude value set previously, and when the amplitude of the transmission signal is beyond the permissible amplitude value, the correction coefficient calculation section 114 calculates a correction coefficient, which will be described later, to output the calculated correction coefficient to multiplication sections 115 and 116. Moreover, the correction coefficient calculation section 114 outputs zero as the correction coefficient to the multiplication sections 115 and 116 when the amplitude of a transmission signal is within the permissible amplitude value.

[0033] The multiplication section 115 multiplies a correction coefficient outputted from the correction coefficient calculation section 114 by the filter coefficient set in the filter coefficient memory 112. Thereby, the multiplication section 115 calculates a correction value of an in-phase component, which will be described later, to output the calculated correction value to a subtraction section 119. Similarly, the multiplication section 116 multiplies a correction coefficient outputted from the correction coefficient calculation section 114 by the filter coefficient set in the filter coefficient memory 112. Thereby, the multiplication section 116 calculates a correction value of an orthogonal component, which will be described later, to output the calculated correction value to a subtraction section 120.

[0034] A delay section 117 delays a signal after the band restriction, which is outputted from the filter 110, for a time equal to a time necessary for a series of correction processing performed in the envelope calculation section 113, the correction coefficient calculation section 114 and the multiplication section 115, and the delay section 117 outputs the delayed signal to the subtraction section 119. Similarly, a delay section 118 delays a signal after the band restriction, which is outputted from the filter 111, for a time equal to a time necessary for a series of correction processing performed in the envelope calculation section 113, the correction coefficient calculation section 114 and the multiplication section 116, and the delay section 118 outputs the delayed signal to the subtraction section 120.

[0035] The subtraction section 119 decreases the amplitude of a transmission signal by subtracting a correction value calculated by the multiplication section 115 from an output signal of the delay section 117. Sim-

ilarly, the subtraction section 120 decreases the amplitude of a transmission signal by subtracting a correction value calculated by the multiplication section 116 from an output signal of the delay section 118.

**[0036]** A D/A conversion section 121 converts a transmission signal of a digital in-phase component outputted from the subtraction section 119 to an analog signal. Similarly, a D/A conversion section 122 converts a transmission signal of a digital orthogonal component outputted from the subtraction section 120 to an analog signal.

**[0037]** Next, the correction coefficient calculation processing performed at the correction coefficient calculation section 114 will be described with reference to the signal point layout drawing of Fig. 3.

**[0038]** In Fig. 3, input signals are designated as  $d(n)$ ,  $d(n+1)$ , ..., and signals to be inserted are designated as  $y(k)$ ,  $y(k+1)$ , ... . Because Fig. 3 shows a filter of twofold over sampling as an example, a signal inserted between each input signal is one. Then, the input signal "d" joined with the inserted signal "y" become filter outputs, and the locus, shown as a full line, connecting the filter outputs corresponds to an envelope before correction.

**[0039]** In Fig. 3, the envelope is beyond a permissible amplitude value indicated by the radius "r" at an inserted signal  $y(k+1)$  between input signals  $d(n+1)$  and  $d(n+2)$ . Accordingly, the base station corrects the input signal "d" so that the inserted signal  $y(k+1)$  becomes an inserted signal  $y'(k+1)$ .

**[0040]** The correction coefficient calculation section 114 first examines amplitude values of the input signals  $d(n+1)$  and  $d(n+2)$  before and after the time "k", and selects the input signal having a larger amplitude value as an object for correction. This is why an envelope of filter outputs can more effectively corrected in the case where the input signal having a larger amplitude value is corrected than in the case where the input signal having a smaller amplitude value is corrected. Accordingly, the correction coefficient calculation section 114 selects the input signal  $d(n+1)$  as a correction object.

**[0041]** And then, the correction coefficient calculation section 114 calculates a correction coefficient in conformity with the following processes for correcting the selected input signal  $d(n+1)$  to an input signal  $d'(n+1)$  so that the envelope is not beyond the permissible amplitude value.

**[0042]** Supposing that an in-phase component of the inserted signal  $y(k+1)$  is  $y_i(k+1)$ , and an orthogonal component of the inserted signal  $y(k+1)$  is  $y_q(k+1)$ , the envelope  $y_e(k+1)$  of the inserted signal  $y(k+1)$  becomes the following expression (1).

$$y_e(k+1) = \sqrt{y_i^2(k+1) + y_q^2(k+1)} \quad (1)$$

**[0043]** The correction coefficient calculation section 114 receives the envelope  $y_e(k+1)$  from the envelope calculation section 113, the in-phase component  $d_i(n+1)$

1) of the input signal  $d(n+1)$  from the filter 110, and the orthogonal component  $d_q(n+1)$  of the input signal  $d(n+1)$  from the filter 111, respectively, and calculates the in-phase component  $d'_i(n+1)$  of the input signal  $d'(n+1)$  in conformity with the following expression (2), and further calculates the orthogonal component  $d'_q(n+1)$  of the input signal  $d'(n+1)$  in conformity with the following expression (3).

$$d'_i(n+1) = d_i(n+1) \times \frac{r}{y_e(k+1)} \quad (2)$$

$$d'_q(n+1) = d_q(n+1) \times \frac{r}{y_e(k+1)} \quad (3)$$

**[0044]** Because the correction coefficient is a difference between an input signal and a signal after the amplitude of the input signal is suppressed, the correction coefficient calculation section 114 calculates the correction coefficient  $\delta_i(n+1)$  of the in-phase component of the input signal  $d'(n+1)$  in conformity with the following expression (4), and calculates the correction coefficient  $\delta_q(n+1)$  of the orthogonal component of the input signal  $d'(n+1)$  in conformity with the following expression (5).

$$\delta_i(n+1) = d_i(n+1) \times \frac{1-r}{y_e(k+1)} \quad (4)$$

$$\delta_q(n+1) = d_q(n+1) \times \frac{1-r}{y_e(k+1)} \quad (5)$$

**[0045]** The correction coefficient calculation section 114 outputs the correction coefficient  $\delta_i(n+1)$  to the multiplication section 115, and outputs the correction coefficient  $\delta_q(n+1)$  to the multiplication section 116. Incidentally, the envelope after the correction is shown in Fig. 3 as a broken line.

**[0046]** Next, the calculation processing of a correction value performed in the multiplication sections 115 and 116 will be described.

**[0047]** Supposing that the tap length of a filter is designated by "J", the multiplication section 115 calculates a correction value  $\Delta_i(k+1)$  of an in-phase component by multiplying the correction coefficient  $\delta_i(n+1)$  inputted from the correction coefficient calculation section 114 by each filter coefficient  $h(j)$  ("j" is an integer, and fills the relational expression  $0 \leq j \leq J$ ) set in the filter coefficient memory 112 and by performing the summation operation of the products as shown in the following expression (6). Similarly, the multiplication section 116 calculates a correction value  $\Delta_q(k+1)$  of an orthogonal component by multiplying the correction coefficient  $\delta_q(n+1)$  inputted from the correction coefficient calculation section 114 by each filter coefficient  $h(j)$  set in the filter coefficient memory 112 and by performing the summation operation of the products as

shown in the following expression (7).

$$\Delta_i(n+1) = \delta_i(n+1) \times \sum_{j=0}^J h(j) \quad (6)$$

$$\Delta_q(n+1) = \delta_q(n+1) \times \sum_{j=0}^J h(j) \quad (7)$$

[0048] The multiplication section 115 outputs the correction value  $\Delta_i(k+1)$  to the subtraction section 119. Moreover, the multiplication section 116 outputs the correction value  $\Delta_q(k+1)$  to the subtraction section 120.

[0049] And then, the inserted signal  $y(k+1)$  is corrected to the inserted signal  $y'(k+1)$  by subtracting the correction values from the filter outputs in the subtraction sections 119 and 120, respectively.

[0050] Next, the flow of a transmission signal in the base station having the aforesaid structure will be described.

[0051] Transmission signals to respective users are modulated in the modulation sections 101-103, respectively, and the spread processing to each modulated signal is performed in the spreading sections 104-106, respectively. After that, the spread signals are multiplexed in the multiplexing section 107.

[0052] Zeros are inserted into no signal portions of the in-phase component of the multiplexed transmission signal in the interpolation section 108. The frequency band of the in-phase component is then restricted on the basis of the filter coefficient in the filter 110. Similarly, zeros are inserted into no signal portions of the orthogonal component of the multiplexed transmission signal in the interpolation section 109. The frequency band of the in-phase component is then restricted on the basis of the filter coefficient in the filter 111.

[0053] And then, the envelope calculation section 113 calculates an envelope based on the outputs of the filters 110 and 111, and the correction coefficient calculation section 114 judges whether the correction of the transmission signal is needed or not on the basis of the relationship of the largeness of the calculated envelope and the permissible amplitude value.

[0054] In the case where the envelope is larger than the permissible amplitude value and the correction is judged to be needed, the correction coefficient calculation section 114 calculates a correction coefficient that is a difference between the inputted signal and the signal after its amplitude is suppressed, and the multiplication sections 115 and 116 calculate the correction value by multiplying the correction coefficient by the filter coefficient.

[0055] The in-phase component of the transmission signal the frequency band of which has been restricted by the filter 110 passes through the delay section 117 to be delayed. After that, a correction value outputted from the multiplication section 115 is subtracted from the

delayed in-phase component to correct it in the subtraction section 119. Similarly, the orthogonal component of the transmission signal the frequency band of which has been restricted by the filter 111 passes through the delay section 118 to be delayed. After that, a correction value outputted from the multiplication section 116 is subtracted from the delayed orthogonal component to correct it in the subtraction section 120.

[0056] The in-phase component and the orthogonal component of the transmission signal after the correction are converted to analog signals by the D/A conversion section 120 and the D/A conversion section 121, respectively.

[0057] As described above, in the case where the amplitude of a transmission signal is beyond a permissible amplitude value, a correction coefficient is calculated, and a correction value obtained by multiplying the correction coefficient by a filter coefficient is subtracted from the transmission signal after a filtering operation. Consequently, a transmission amplitude at the time of a peak can be suppressed without the increase of the number of filter operation circuits.

#### (EMBODIMENT 2)

[0058] Fig. 4 is a block diagram showing the structure of a base station according to the embodiment 2 of the present invention. Incidentally, the components in Fig. 4 similar to those in Fig. 2 are designated by the same reference numerals as those in Fig. 2, and their descriptions are omitted. The base station shown in Fig. 4 has a structure including multiplication sections 201 and 202 and averaging sections 203 and 204 in addition to the components of the base station shown in Fig. 2.

[0059] When the amplitude of a transmission signal calculated by the envelope calculation section 113 is beyond a permissible amplitude value, the correction coefficient calculation section 114 calculates the difference between the amplitudes of the transmission signal before and after the time, and performs the comparison of the largeness between the absolute value of the difference and a threshold value set previously. When the absolute value is not beyond the threshold value, the correction coefficient calculation section 114 calculates a correction coefficient to each transmission signal, and outputs the correction coefficient of an in-phase component to the multiplication sections 115 and 201, and further outputs the correction coefficient of an orthogonal component to the multiplication sections 116 and 202.

[0060] Incidentally, when the amplitude of a transmission signal is not beyond the permissible amplitude value or the absolute value of the difference is beyond the threshold value, the correction coefficient calculation section 114 outputs the correction coefficient to the multiplication sections 115 and 116 similarly in the embodiment 1.

[0061] The multiplication section 201 calculates a correction value of an in-phase component by multiply-

ing the correction coefficient outputted from the correction coefficient calculation section 114 by the filter coefficient set in the filter coefficient memory 112. Similarly, the multiplication section 202 calculates a correction value of an orthogonal component by multiplying the correction coefficient outputted from the correction coefficient calculation section 114 by the filter coefficient set in the filter coefficient memory 112.

[0062] Then, the multiplication sections 115 and 201 output the calculated correction value of the in-phase component to the averaging section 203. Moreover, the multiplication sections 116 and 202 output the calculated correction value of the orthogonal component to the averaging section 204.

[0063] The averaging section 203 averages the correction values of the in-phase component inputted from the multiplication sections 115 and 201, respectively, to output it to the subtraction section 119. Similarly, the averaging section 204 averages the correction values of the orthogonal component inputted from the multiplication sections 116 and 202, respectively, to output it to the subtraction section 120.

[0064] As described above, when the difference between the amplitudes of transmission signals before and after a transmission signal beyond the permissible amplitude value is small, the embodiment 2 calculates a correction coefficient to each transmission signal, and suppresses the transmission amplitude at the time of a peak on the basis of the calculated correction coefficient. Consequently, the embodiment 2 can suppress the transmission amplitude at the time of a peak more precisely than the embodiment 1.

[0065] As apparent from the aforesaid description, according to the base station apparatus and the method for suppressing a peak power of the present invention, the transmission amplitude at the time of a peak can be suppressed without increasing the number of filter operation circuits. Consequently, signals can be transmitted without being distorted with an amplifier having a narrow linear operation range without increasing the scale of the circuit. Therefore, it can be schemed to minimize the apparatus and to decrease its consumption electric power.

[0066] This application is based on the Japanese Patent Application No. HEI 11-116054 filed on April 23, 1999, entire content of which is expressly incorporated by reference herein.

## Claims

### 1. A base station apparatus comprising:

filtering means for performing band restriction of a multiplex transmission signal;  
envelope calculation means for calculating an envelope of the signal after the band restriction, and  
correction means for performing a correction of

the signal after the band restriction for suppressing an excessive envelope while meeting a frequency characteristic of a filter when the envelope is beyond a permissible value.

2. The base station apparatus according to claim 1, wherein said correction means calculates a correction coefficient, which is a difference between amplitude values before and after said correction, of each component, and multiply the correction coefficient of each component by a filter coefficient to calculate a correction value, and further subtracts the correction value from the signal after said restriction.
3. The base station apparatus according to claim 2, wherein said correction means, in case of correcting an interpolated signal, calculates a correction value of an input signal having a larger envelope between input signals before and after the interpolated signal, which is an object of said correction, and subtracts the correction value from the object of said correction after said band restriction.
4. The base station apparatus according to claim 3, wherein said correction means, in a case where a difference between envelopes of said input signals before and after said interpolated signal being said object of said correction envelope is smaller than a threshold value, calculates correction values of said input signals, respectively, to average them, and subtracts an average value of the correction values from said object of said correction after said band restriction.
5. A communication terminal apparatus for performing radio communication with a base station according to claim 1.
6. A method for suppressing a peak power, said method comprising the steps of:

performing band restriction of a multiplex transmission signal, and  
performing a correction of the signal after the band restriction for suppressing an excessive envelope while meeting a frequency characteristic of a filter when the envelope is beyond a permissible value.

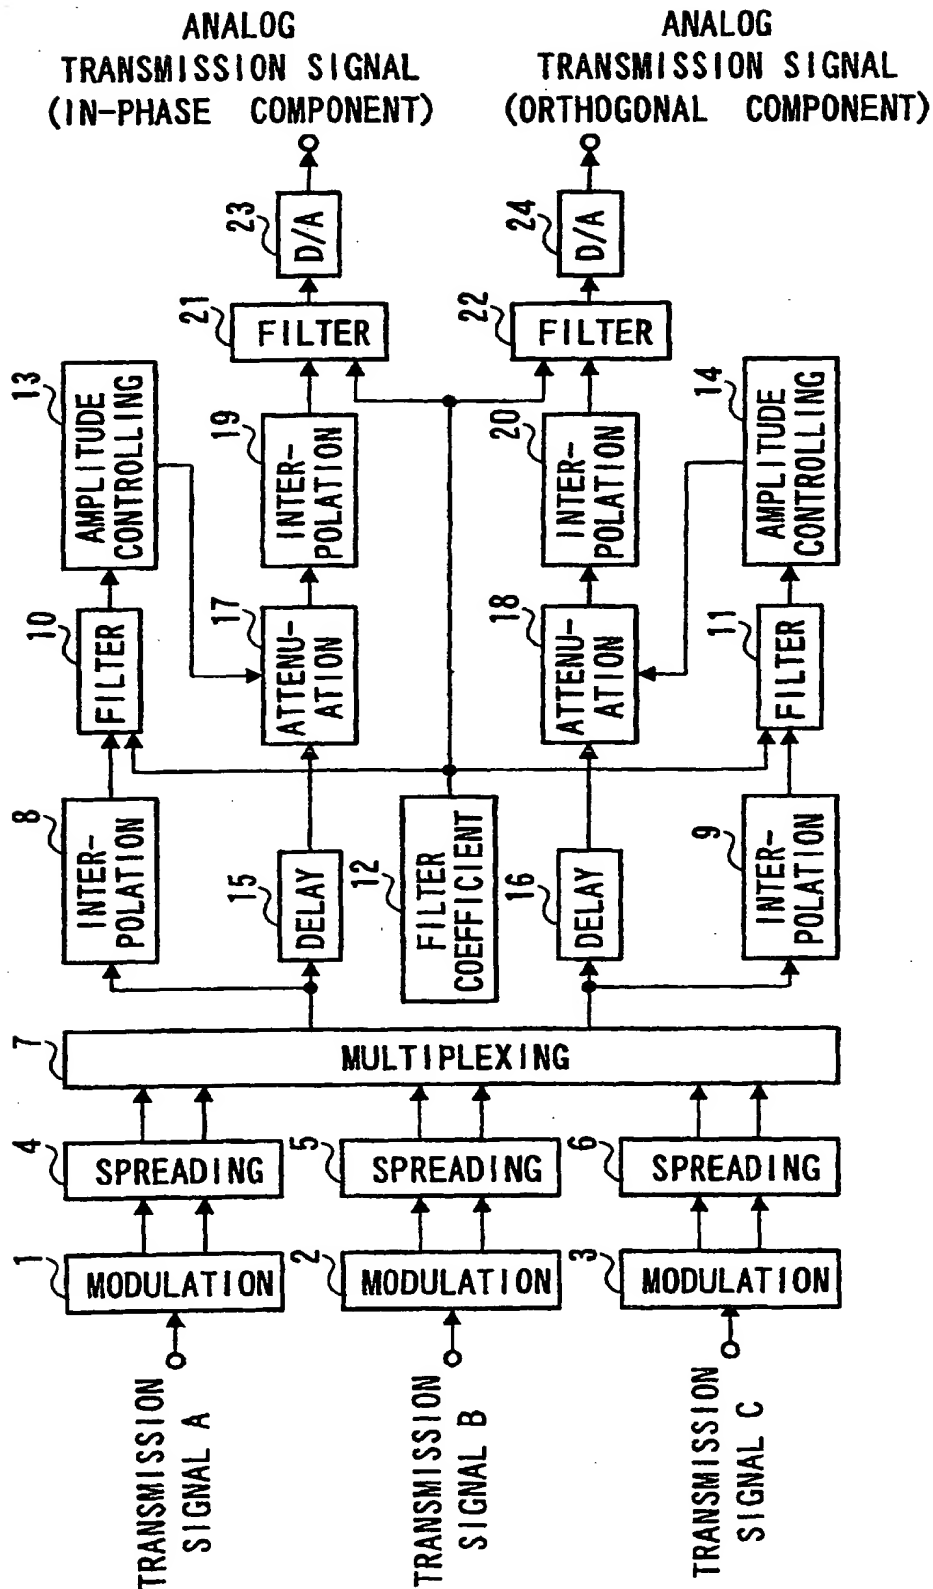


FIG. 1



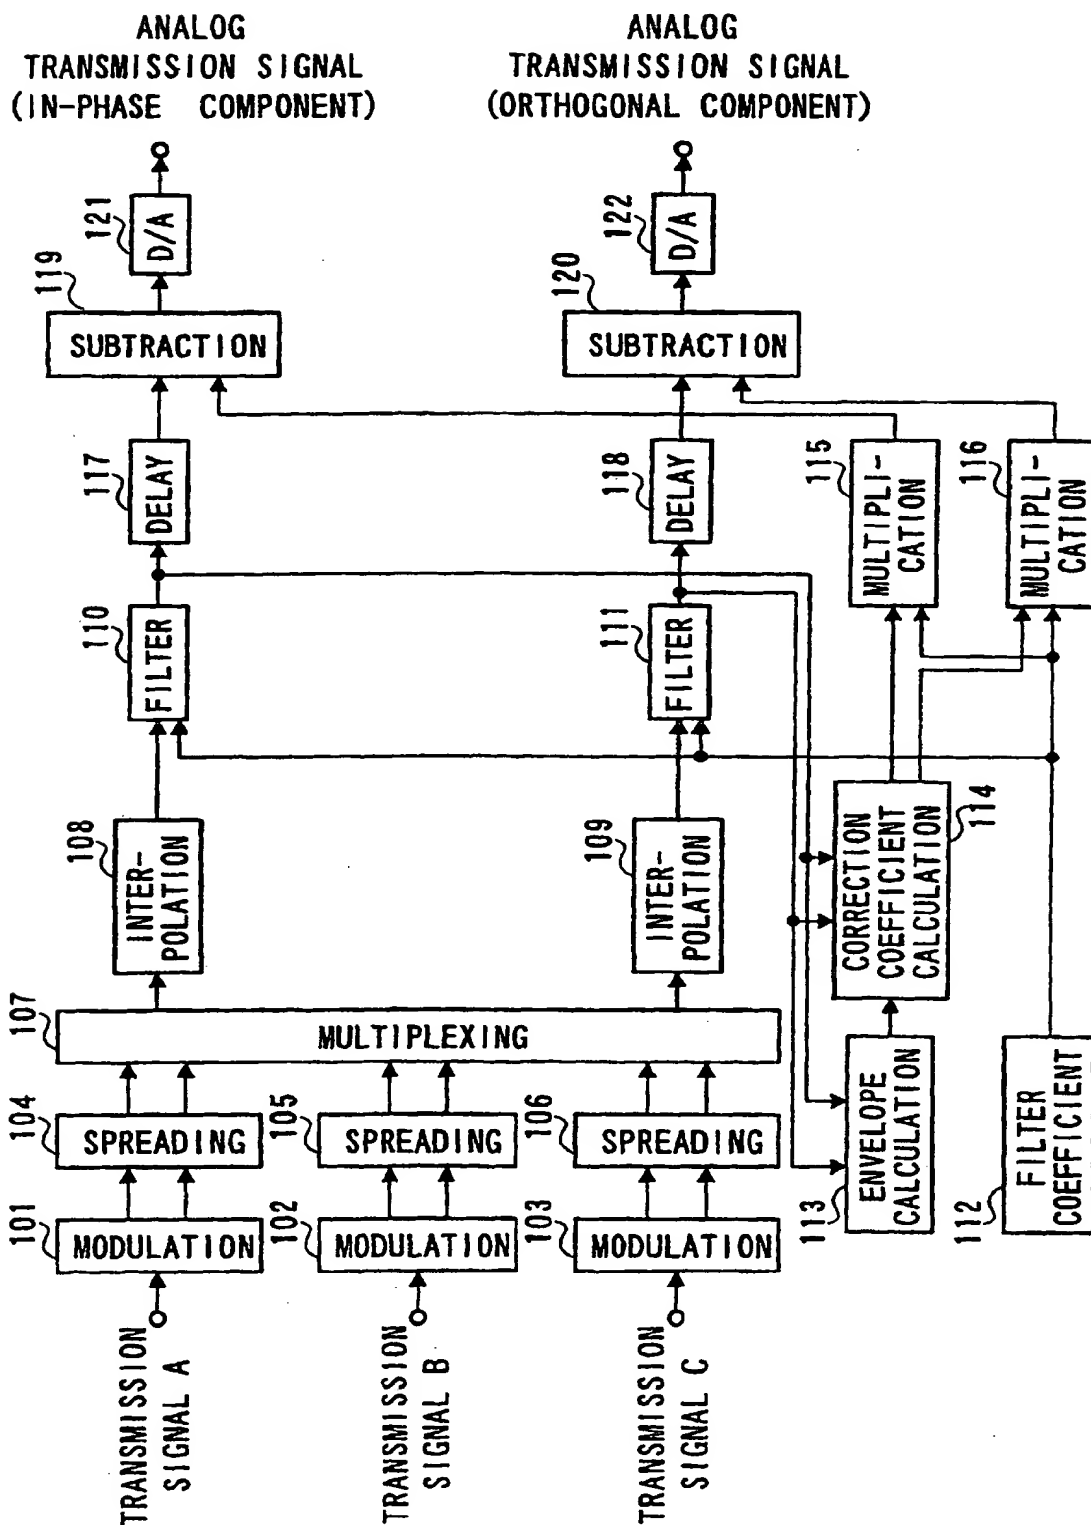


FIG. 2

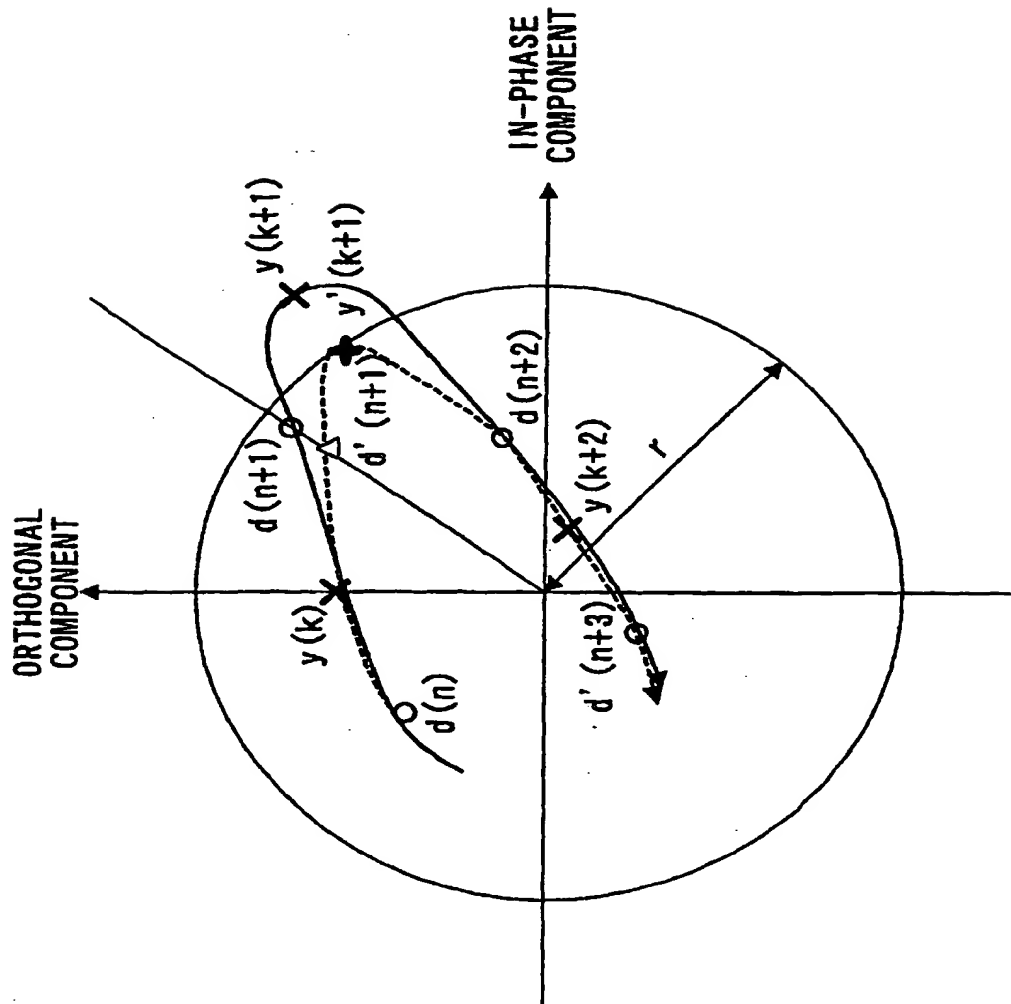


FIG. 3

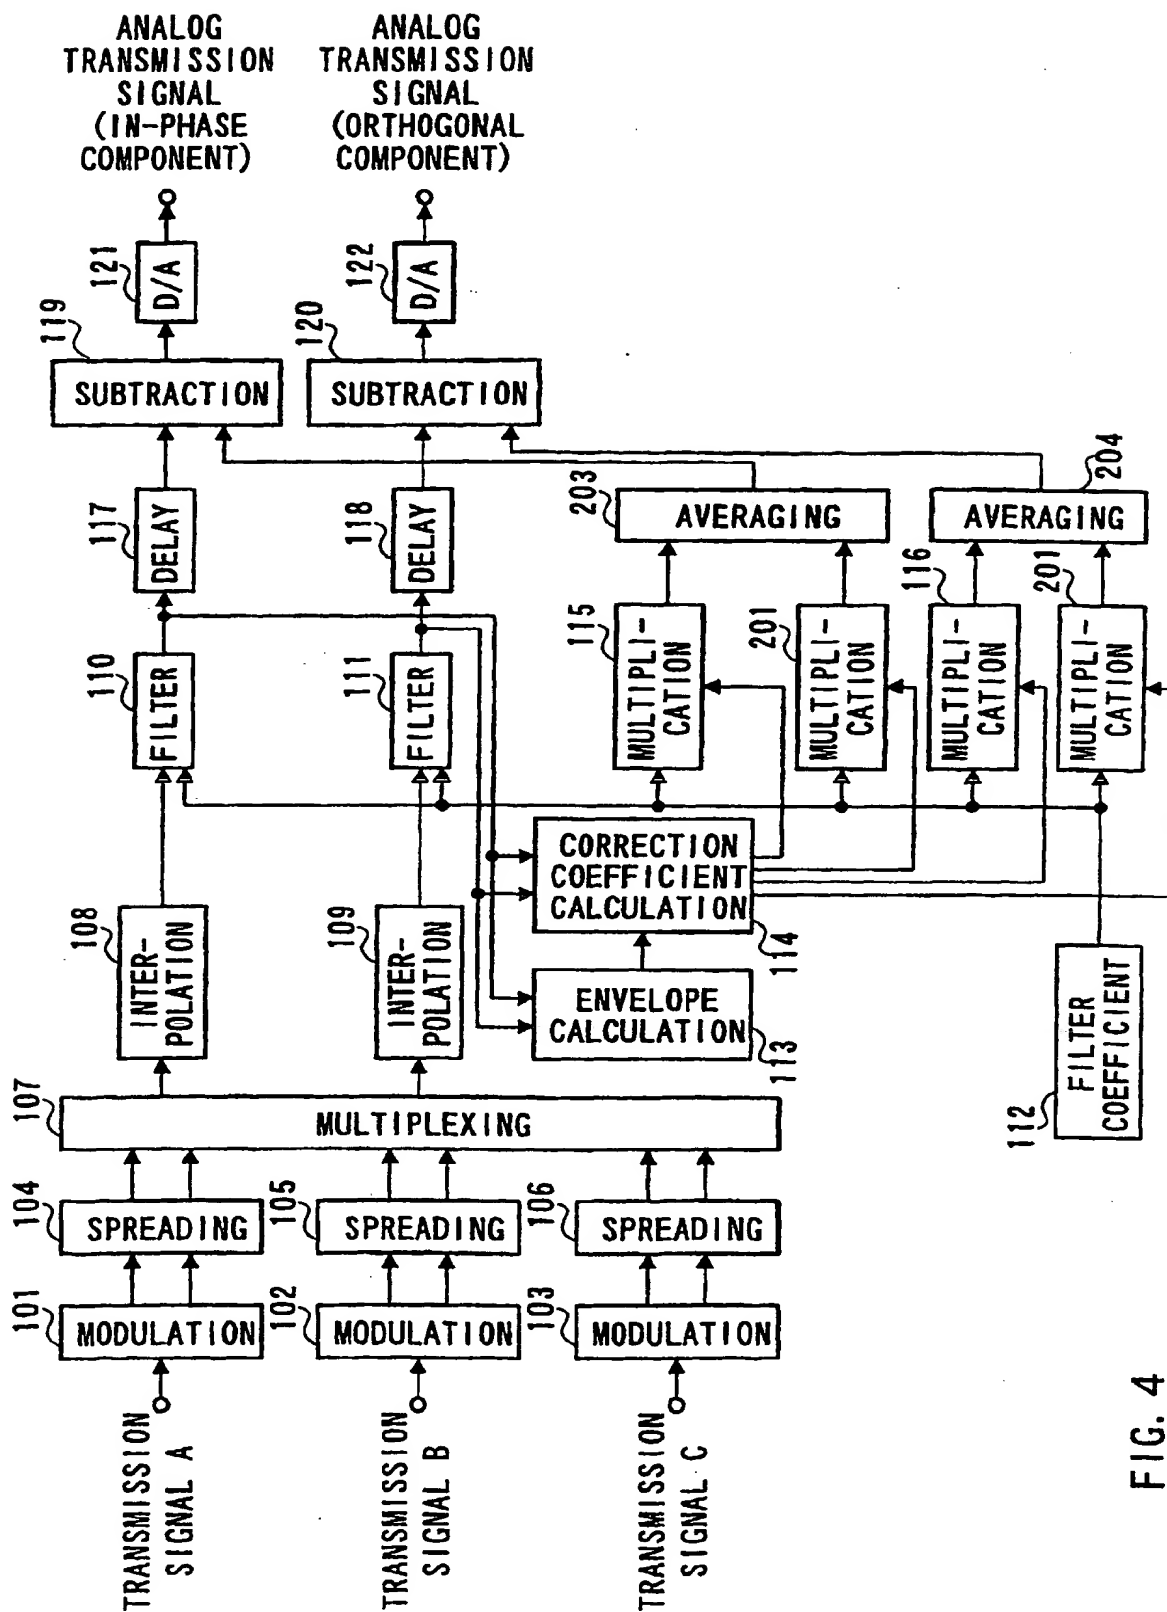


FIG. 4

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP00/02498

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> Int.Cl <sup>7</sup> H04J13/04, H04B7/26, 102, H04B1/40, H03G3/20		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) Int.Cl <sup>7</sup> H04J13/00-13/06, H04B1/69-1/713, H04B7/26, 102, H04B1/40, H03G3/20		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1926-1996 Toroku Jitsuyo Shinan Koho 1994-2000 Kokai Jitsuyo Shinan Koho 1971-2000 Jitsuyo Shinan Toroku Koho 1996-2000		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP, 10-65647, A (NTT Ido Tsushinmo K.K.), 06 March, 1998 (06.03.98), Full text; Figs. 1 to 18 (Family: none)	1-6
A	EP, 751630, A2 (NEC CORPORATION), 02 January, 1997 (02.01.97), Full text; Figs. 1 to 11 & US, 5751705, A & JP, 9-18451, A & CA, 2179977, A & KR, 97004397, A	1-6
A	EP, 743768, A1 (NTT MOBILE COMMUNICATIONS NETWORK INC.), 20 November, 1996 (20.11.96), Full text; Figs. 1 to 30 & WO, 96/18249, A1 & US, 5790555, A & CN, 1138926, A & CA, 2178815, C & KR, 97700966, A	1-6
A	US, 6009090, A (Fujitsu Limited), 28 December, 1999 (28.12.99), Full text & JP, 10-178414, A & KR, 98063366, A	1-6
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 06 July, 2000 (06.07.00)		Date of mailing of the international search report 18 July, 2000 (18.07.00)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP00/02498

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	Proceedings 1 of communication society meeting in 1997, the Institute of Electronics, Information and Communication Engineers, 13 August, 1997 (13.08.97) (Tokyo) T. Garaku et. al, "CDMA Taju Shingo no Shinpuku Seigen Houshiki no Teian" p.294	1-6

Form PCT/ISA/210 (continuation of second sheet) (July 1992)